


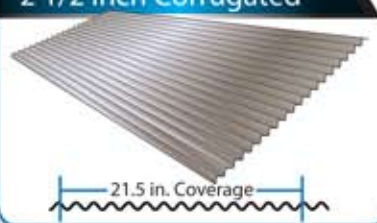


PROFILE SELECTOR

>> PROFILE SELECTION GUIDE

**Typical Applications:** Architectural, Residential, Light Commercial/Industrial Post-Frame Buildings, Garages, Porches, Gazebos. **Retrofit** over existing roof. **Finish/Substrate Gauge Warranty Certifications & Testing**

Profile	Finish/Substrate	Gauge	Warranty	Certifications & Testing
<b>2 1/2 inch Corrugated</b>  21.5 in. Coverage	Galvanized	29	N/A	UL 790 Fire Resistance Class A
	Painted/Galvanized	26	N/A	
<b>Energy Pro</b>  36 in. Coverage	Galvanized	29	N/A	UL 790 Fire Resistance Class A
	Painted/Galvanized	29	40 years	
<b>PBR</b>  36 in. Coverage	Galvalume®	26,29	25 years	UL 2218 impact Resistance Class 4
	Painted/Galvalume®	26,29	N/A	UL 580 Uplift UL Class 90
<b>Energy-Lock Standing Seam</b>  16 in. Coverage	Painted/Galvalume®	26	50 years	UL 790 Fire Resistance Class A
	Painted/Galvalume®	24	40 year	
<b>Energy-Lock Standing Seam</b>  16 in. Coverage	Painted/Galvalume®	26	50 years	UL 790 Fire Resistance Class A
	Painted/Galvalume®	24	40 year	

The lower the gauge number, the thicker the metal. 29 gauge is the minimum thickness recommended for residential applications.

Let's build a future together